

产品特性/Product Features

- IP6K9K
- 30A 85°C
- 12-750VDC
- 1000MΩ (1000VDC) , IEC 60664-1
-

触点参数 / Contact parameters

		1a	
		≤5m (at 30A)	
		30A	
		2×10 ⁵	
		450V型	750V型
		1000VDC	1000VDC
		300A(320VDC)1	300A(320VDC)1
		13.5kW	22.5kW
1)		2×10 ⁴ 450VDC, 30A	1×10 ⁴ 750VDC, 30A
		7.5×10 ⁴ 450VDC, 30A	7.5×10 ⁴ 450VDC, 30A
2)		30A:	
		60A:60min	
		80A:20min	
		160A:30s	
		300A:0.6S	
1	23°C	0.6s	5.4s
2	85°C	10mm ²	" "

	18	2.4	3.8W
--	----	-----	------


(-40°C ~ 85°C)

ing hole size


/Unit mm

安装孔尺寸 / 接线图 Mounting hole size/Wiring diagram

Mounting hole size

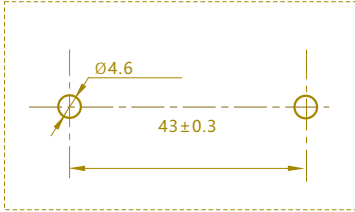


Wiring diagram




性能曲线图 Performance graph

Electrical life curve

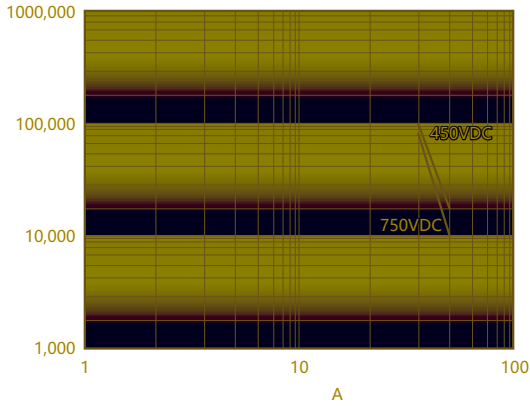

Tolerance curve

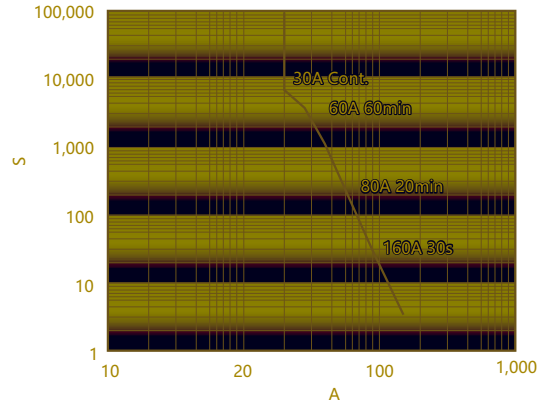

/ 0.6S 5.4S

85°C , 10mm²



使用注意事项 Precautions for use

1

M4	1.8N·m 2.7N·m	Ø4.0~Ø4.5mm	3mm	M4螺钉	1.8N·m~2.7N·m
----	---------------	-------------	-----	------	---------------

2

10mm²

3

3mm



声明/Statement:

1、

2、